




SEALTITE™ PRO HFO

PERFORMANCE + SUSTAINABILITY. COVERED.



Our 2nd generation HFO spray foam insulation product features a new and improved formulation making SealTite PRO HFO the best spraying low-GWP product on the market today.

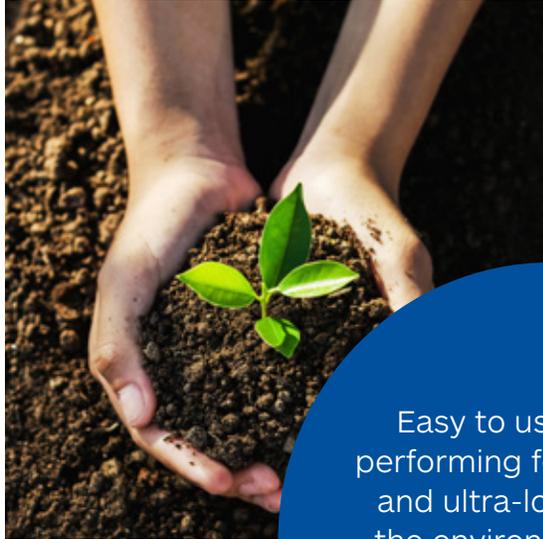

Easy to use and high performing for applicators and ultra-low impact to the environment makes it the perfect blend of performance and sustainability.



WHAT OUR CUSTOMERS HAVE TO SAY.

The guys really like spraying Carlisle's SealTite PRO HFO. Having tried other closed cell foams, SealTite PRO HFO is the best fit for our Company because it sprays very similarly to some of the HFCs of old and doesn't create as much internal heat as other brands currently on the market. In addition, we did a yield calc on one of our jobs recently and were on track for roughly 5520 bd ft for the set, that's a good number!

- Spray Foam Manager, Anderson Insulation





WHY HFOS

HFO stands for hydrofluoroolefin. It's the most recent blowing agent technology for spray foam that makes it less harmful to the environment. HFOS have ultra-low Global Warming Potential (GWP), making them the most environmentally friendly option.

As more and more states mandate not using products containing HFCs, turn to SealTite PRO HFO for a smart, sustainable solution that outperforms all other HFO spray foam insulation on the market today.

WHY SEALTITE PRO HFO

Carlisle Spray Foam Insulation is continuing to innovate and invest in our HFO technology which is why we are introducing a new and improved second generation HFO product. SealTite PRO HFO took three years to develop to ensure consistent performance and sprayability in all conditions. Now it's ready for your next project.

SealTite PRO HFO is the newest HFO on the market for high performance and low impact. It's a leading-edge alternative to HFCs you can use to meet environmental impact requirements for spray foam insulation in your state.

FEATURES & BENEFITS



EASY TO USE

Application is a breeze with this HFO that sprays like an HFC

- Lower equipment temperatures than most HFOs for less downtime
- Smoother, more consistent spraying experience (from 0.5" to 4")
- Greater control at thin passes for less waste



INCREASED APPLICATOR PRODUCTIVITY

Higher performance helps your bottom line

- Class II Vapor Retarder at just 1" – lowest material needed among industry HFOs
- Consistent per inch R-value
- Predictable performance means consistent jobsite estimation accuracy



ENVIRONMENTALLY RESPONSIBLE

Save time, money and the planet

- Up to 96% lower global warming potential than other low GWP products in the market
- No flammable or hazardous blowing agents
- Complies with all federal and state environmental regulations
- Supported by a product specific EPD



TRUSTED QUALITY

Backed by experience and support of Carlisle

- Manufactured in the United States by an ISO 9001:2015 certified facility
- Industry-leading testing standards backed by extensive quality checks mean little to no in-field issues
- Committed to helping you with best-in-class training and technical support



SCAN HERE TO LEARN MORE ABOUT THE PERFORMANCE & SUSTAINABILITY OF SEALTITE PRO HFO.